

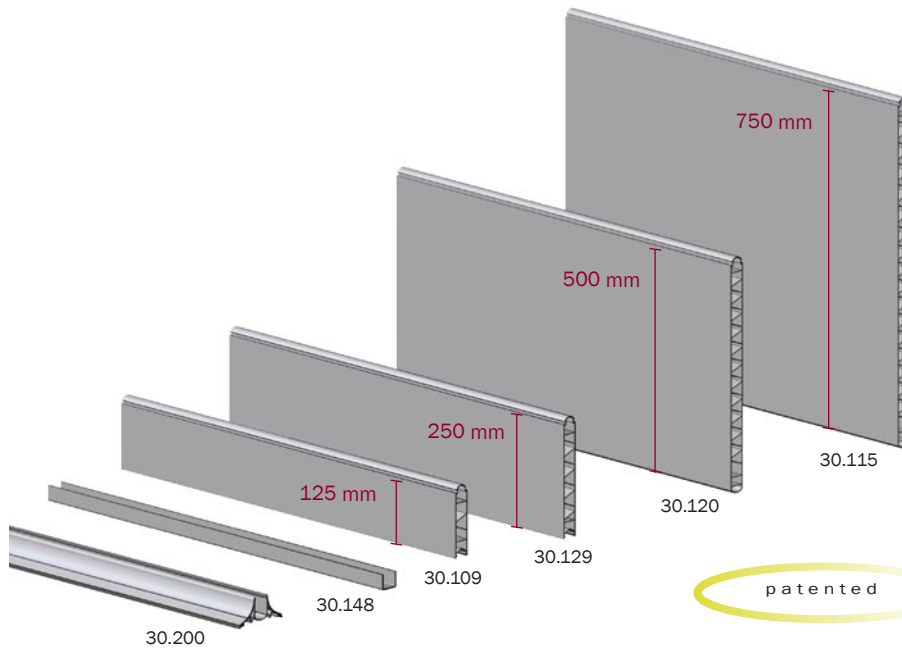




# CLEAN-O-FLEX® - panels


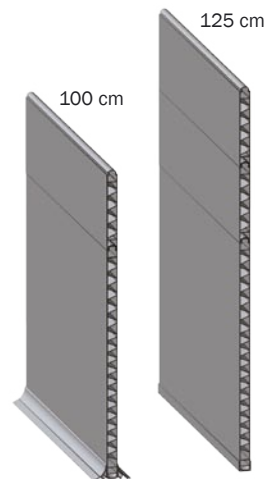


## examples




- |  |  |
|--|--|
| <b>Unique pressure and warping stability</b> | <ul style="list-style-type: none"> <li>Patented ZIG-ZAG buttress makes the panels more stable than an ordinary panel partitions</li> </ul> |
| <b>Resistant and durable</b>                 | <ul style="list-style-type: none"> <li>PVC surface</li> </ul>  |
| <b>Easy and quickly assembling</b>           | <ul style="list-style-type: none"> <li>The panels are assembled by a click-system</li> </ul>   |
| <b>Easy cleaning</b>                         | <ul style="list-style-type: none"> <li>Tight, strong and smooth surface, round bottom</li> </ul>   |

The **CLEAN-O-FLEX® concept** includes a **bottom profile** with supports, connecting to the floor, when the profile is bolted to the floor with a stainless concrete screw and the rubber edge is pressed down towards the concrete floor.

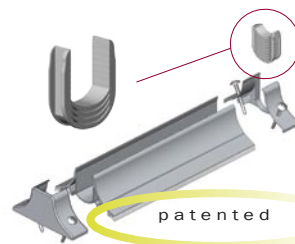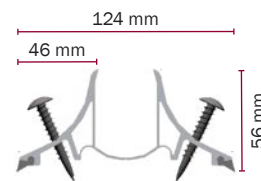

- |                      |  |
|----------------------|--|
| <b>Hygienic</b>      | <ul style="list-style-type: none"> <li>No gaps between panel and floor</li> </ul>                            |
| <b>Low costs</b>     | <ul style="list-style-type: none"> <li>Saves costs for extra concreting</li> </ul>                           |
| <b>Durable</b>       | <ul style="list-style-type: none"> <li>Very durable regarding exposure and cleaning</li> </ul>               |
| <b>Easy cleaning</b> | <ul style="list-style-type: none"> <li>The weaners do not defecate against the bevelled end piece</li> </ul> |

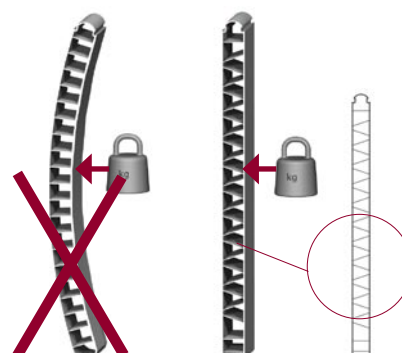

PANELS	
No.	Description
30.109	PVC panels 35 x 125 mm length 5.9 m. With click-bottom
30.129	PVC panels 35 x 250 mm length 5.9 m. With click-bottom
30.120	PVC panels 35 x 500 mm length 5.9 m. With round bottom
30.115	PVC panels 35 x 750 mm length 5.9 m. With round bottom
30.148	PVC U-rail for floor length 5.9 m
30.200	PVC bottom profile with supports length 5.9 m
67.300	6.5 x 50 concrete screw torx 27 stainless (1 in each side per 50 cm)
30.208	End profile
30.210	End profile with height adjustable end stop
30.211	Height adjustable end stop for panel max. 4 cm from floor/slats

